

CS-200



4-Slot Mobile POS Terminal Charger

User Manual

The CS-200 4-slot battery charger is an accessory serving for the MT mobile POS terminal. The charger can charge up to 4 units of MT terminals each time.

Important Instructions:

Please read this manual before you use the charger, and save it for reference.

Caution:

- ✧ Do not disassemble the charger.
- ✧ Do not use the charger as a power source for any electrical equipment.
- ✧ Use the charger in a well ventilated area and keeps it away from electrically conductive or inflammable materials.
- ✧ Keep the charger well away from areas of dust, damp, rain, heat, direct sunshine and vibration and do not make it drop.
- ✧ Do not plug the charger into any extension power socket.
- ✧ Always unplug the charger from outlet before maintaining or cleaning the charger.

Package Contents:


- ✧ CS-200 4-slot mobile POS terminal charger (x 1)
- ✧ 12V/60W Power adaptor + power cord (x 1) (depending on country type ordered)

Features:

- ✧ 4- slot battery charger
- ✧ Automatic detection of battery capacity
- ✧ User-friendly
- ✧ Clear indication of the charging state of each slot

View of the CS-200:

➤ Top View of CS-200:

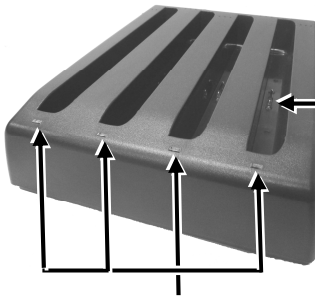


Battery charging status LED for each system

Bottom View of CS-200:


Charging Connect

DC power jack



Charging the battery:

1. Connect the connector of power adapter to the “DC IN” power jack on the bottom of the charger. Plug the AC power adapter cord into AC outlet.
2. Plug the power adapter into an outlet.
3. Insert one or more MT-series terminals firmly into the charger slot in orientation.

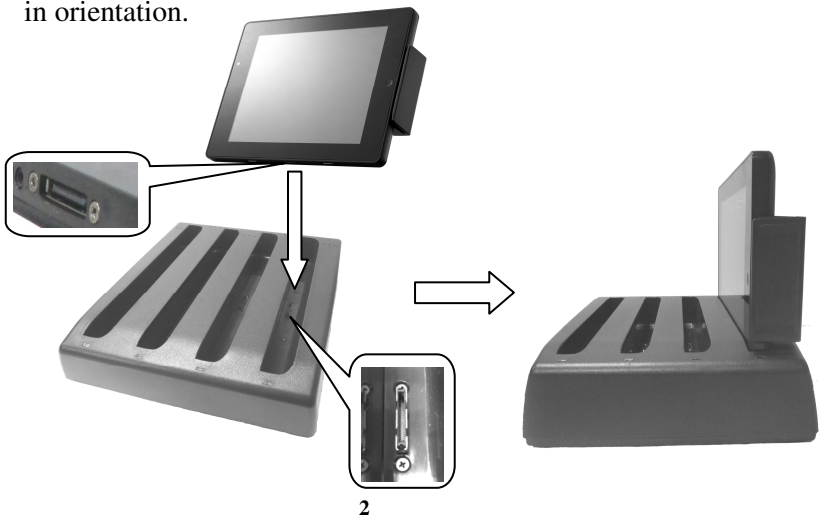

4. The charger will automatically detect the capacity of each battery and begin charging. The LED indicator on the charger turns orange blink.
5. When the MT-series terminal is fully charged, the LED indicator on the charger turns solid green.
6. In stand-by mode, it takes just about 5 hours for the charger to fully charge a battery; in power-off mode, it takes just about 4 hours.

NOTE: CS-200 can also charge the MT-series terminal even if the MT-series terminal is powered ON. However, for safety concern, we recommend that you power off the MT-series terminal before charging.

LED Indicator Status:

- ✧ Orange: Charger power ON
- ✧ Orange blink every 0.5 second: battery capacity under 80%
- ✧ Green blink every 1 second: battery capacity above 80%
- ✧ Green: charge full

Specifications:

Power Input	12V DC/60W
Power Output	5V DC/ 2A (Max.) per slot
Number of Charger Slot	4 slots (Max.)
Operating Condition	5°C ~ 40°C, 20% RH ~ 90% RH
Storage Condition	-20°C - 45°C, 10%RH - 90%RH